

01


version

Proposal

Biogas plant 1000 kW el. brutto
using 55 tonnes chicken dung/day



Date: 06/10/2025
Validity: 3 months

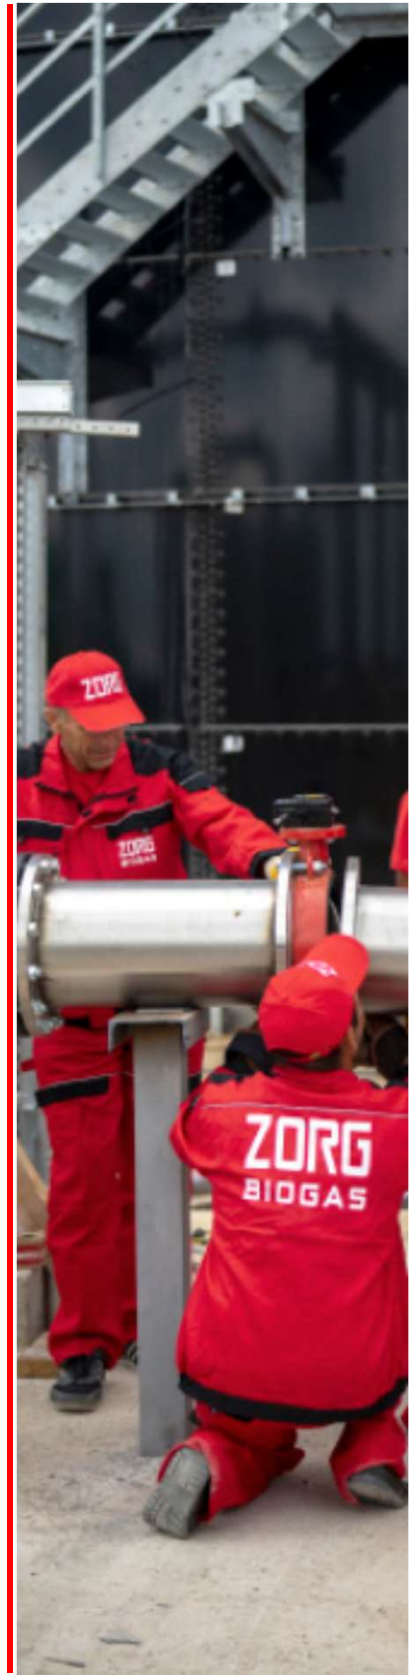

CONTENT

Overview	3
Raw material potential	4
Biogas plant characteristics	5
Number of personnel	5
Working principle	6
Technological process of biogas production	7
Main equipment	8
Solid feeder	9
Reactor	10
Reactors` agitator	11
Window with spotlight	12
Pump equipment	13
Separator	14
Receiving tank and Filtrate tank	15
Submersible mixer	16
Gasholder	17
Biogas Scrubber	18
Biogas cooling system	19
Biogas compressor	20
Desulphurization system	21
Cogeneration Power Plant	22
Biogas burner	23
Water supplying and sewerage system	24
Heating system	25
Dry cooler (cooling substrate system)	26
Automation and electrical equipment	27
Gas analyzer	28
Sensors set	29
Laboratory	30
Specification list	31
Appendices:	36
Appendix 1. Material flow diagram	37
Appendix 2. Basic diagram	38
Appendix 3. Plan of biogas plant	39
Appendix 4. Electric power consumption	40
Appendix 5. Equipment price	41
Appendix 6. Implementation terms and payment	42



OVERVIEW

We offer a solution to process chicken dung with bedding and fatty pulp into biogas in a single-stage CSTR digester. Biogas is used in a co-generator 1000 kW el. power gross/ 905 kW netto. Bolted reactor $V=3974 \text{ m}^3$ is made out of glass-lined steel panels.

Chicken dung has high protein content. During the digestion ammonia is produced that inhibits the anaerobic reaction. To solve this problem sulphuric acid is used that is produced as a side-product by a biogas scrubber. This method has an advantage. Biogas scrubber serves two functions: sulphur removal and production of acid for the ammonia neutralisation. Sulphuric acid reacts with ammonia with the production of ammonium sulphate, a fertilizer. A scrubber needed anyway to remove sulphur. And the ammonia problem solving is in fact "for free".

Another characteristic of the broiler dung is bedding. It should be shredded in order not to create problems during the mixing and pumping. The solid feeder has a special design. There are knives inside of the bunker which cut the feedstock to small pieces.

Zorg makes the detailed engineering, supplies equipment and provides supervision during construction as well as training and start-up. The construction and installation are done by Client under Zorg' supervision

Raw material potential

Substrate	Quantity (tonnes/day)	Quantity (tonnes/year)	DM content (%)	oDM content (%)	DM quantity (tonnes/day)	oDM quantity (tonnes/day)	Biogas yield (m ³ /tonnesODM)	Biogas (m ³ /day)	Methane content (%)	Biomethane (m ³ /year)
Chicken dung with bedding	55	20 075	55	76	30,3	22,99	370	8 506	60	3 104 690
Fatty pulp	4	1 460	20	96	0,8	0,77	1000	768	75	280 320
Total	59	21 535			31,1	23,76		9 274	61	3 385 010

***-DM- dry matters
 ***-oDM- organic dry matters

Biogas plant characteristics

Characteristics	Values	Figures
Reactor	units	1
Volume:		
Work	m ³	3413
Overall		3974
Temperature	°C	38
Overall dimensions of the digester:		
diameter	m	29,88
height		5,67
Organic load	kgODM/m3	6,96
Hydraulic retention time (gross/net)	days	28/24
Number of gasholders	units	1
Volume:	m ³	1690
Dimensions of the gasholder:		
diameter		30,0
Height	m	6,0

Number of personnel

	Shift 1	Shift 2	Shift 3
Operator	1	1	1
Driver	1	-	-
Manager	1	-	-
Total	5		



Biogas plant working principle

The technology is based on the biochemical conversion of organic materials from high molecular weight compounds to low molecular weight compounds. The first stage of this process is hydrolysis. Hydrolysis produces organic acids and alcohols.

Organic compounds + $H_2O \rightarrow C_5H_7NO_2 + HCO_3$.

Further conversion of obtained dissolved compounds like organic acids and alcohols ($C_5H_7NO_2, HCO_3$) into gases - CH_4, CO_2 . $C_5H_7NO_2 + HCO_3 + H_2O \rightarrow CH_4 + CO_2 + NH_4$.

Biological process of consecutive (phasic) conversion of organic compounds take place in anaerobic environment i.e. in oxygen-free tank (biological reactor). At the first stage of fermentation, substrate hydrolysis take place under acidogenic bacteria influence. At the second stage, elementary organic compounds come through hydrolysis oxidation by means of hetero-acidogenic bacteria with production of acetate, carbon dioxide, and free hydrogen. The

other part of the organic compound including acetate forms C1 compounds (elementary organic acids). Produced substances are the feedstock for methanogenic bacteria of the third type. This stage flows in two processes of A and B type the character which depends on caused by different bacteria type. These two types of bacteria convert the compound obtained during the first and second stages into methane CH_4 , water H_2O and carbon dioxide CO_2 . Methanogenic bacteria are more sensitive to the living environment compared to acidogenic bacteria. They require a complete anaerobic environment and a longer reproduction period. The speed and scale of anaerobic fermentation depends on bacteria metabolic activity. That is why the biogas plant chemical process includes hydrolysis stage, oxidation, and methanization stage. For that kind of substrate, these processes take place in the same reactor

Technological process of biogas production

Chicken dung is directed into a loader. The loader input substrates by portion to a reactor using augers. Fatty pulp is loaded into a receiving tank. The receiving tank is equipped with a submersible mixer, level sensors. Substrate from the receiving tank is loaded into the reactor by portion with pump.

In the reactor the substrate is brought up to a temperature of +38°C. Constant temperature is sustained for the entire digesting period. To prevent a rise in temperature (for example, in summer), the biogas station is equipped with a cooler (dry cooling). The reactor operating regime is mesophilic. The heated substrate in the digester is blended periodically. Mixing is performed by vertical agitators. The average time of processing in the reactors is 28 days. After the reactor, the substrate is fed by pump to a separator area where it is separated into solid and liquid bio-fertilizer. Solid bio-fertilizer is discharged from the separation area and transported for storage; liquid filtrate is directed to a lagoon. Biogas goes up under overlap and delivered into a gasholder through pipeline. The gasholder's weather protective film protects the gasholder from precipitation and damage by foreign objects. The weather protective film is fixed firmly by a special system. To protect the gasholder from overpressure, digesters are equipped with safety valves, which start

working at a pressure of 5 mbars and bleeds biogas to the atmosphere.

Air is supplied in portions to the digester for biogas bio-purification from hydrogen sulfide.


Desulfurization system is two-stage purification of sulfur that is contained in the biogas:

- by air- the first stage of purification;
- coal column - the second stage.

Accumulated in gasholder biogas goes through a gas pipeline to a biogas cooler with a condensate discharge unit and then to a compressor, where the pressure is raised up to 80-150 mbar to meet engine requirements. After the compressor, biogas is fed to activated coal filters to remove hydrogen sulfide (H₂S). After filters, the biogas goes to the co-generator to produce electric and heat energy.

All technological processes are controlled and operated by an automatic system. Biogas plant work is monitored at the central control room monitor. The control room is equipped with a central control unit, which allows the switching of any biogas plant module into automatic or manual mode with local or remote control.

MAIN EQUIPMENT

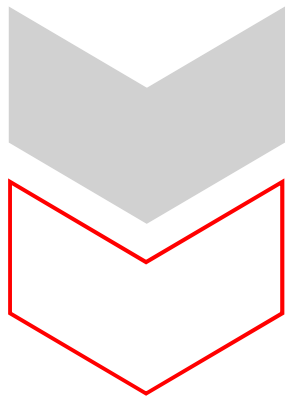



Solid feeder (SF-01)

Solid feeder machines have been proven in various situations. Solid feeder has the solid design, which guarantees a maximum functionality and less maintenance, combined to a low energy consumption. Because of the vertically oriented walls, there is no change for the material to get stuck or build bridges. The conveyor chains and the milling-unit allow continuous dosing by various types of materials. Furthermore, the material is loosened by this dosing process. The user is able to control the material flow up to 15 m³/h or more, regarding to the own consumption of electrical power by the machine. In addition, the corrosion protection, wear resistance and high quality allow customers to use our product for a long period of time.

Specifications

Height:	1,56 m
Length:	5,83 m
Width:	2,79 m
Volume:	20 m ³
Quantity:	1 pcs.



Reactor (R-01)


The fermenter is an important part of the biogas plant, made of sheet metal with an enamel coating. Metal reactors are installed on a concrete base. The enamel layer protects the surface of the entire metal structure. The enamel is glassy and very resistant to aggressive pH and mechanical damage. The enameled fermenter is assembled from steel segments. Such a fermenter is quickly and safely mounted. The steel fermenter has the following advantages:

- Steel panels are joined at bolted joints with a special sealant. Thus, the impermeability of the substrate through the joint is achieved, and certain panels can be replaced;
- The enamel coating is layered using the PUESTA method. This is a special powder that is laid in layers by electrostatic attraction.
- Bolts are made of stainless steel;
- All elements (flanges, etc.) are connected through an EPDM membrane to protect the enamel.

To reduce heat consumption and maintain a constant temperature, the fermenter is insulated. The outside of the fermenter is covered with a decorative coating

Specifications

Height:	5,67 m
Diameter:	29,88 m
Total volume:	3974 m ³
Substrate volume	3413 m ³
Quantity:	1 pcs.

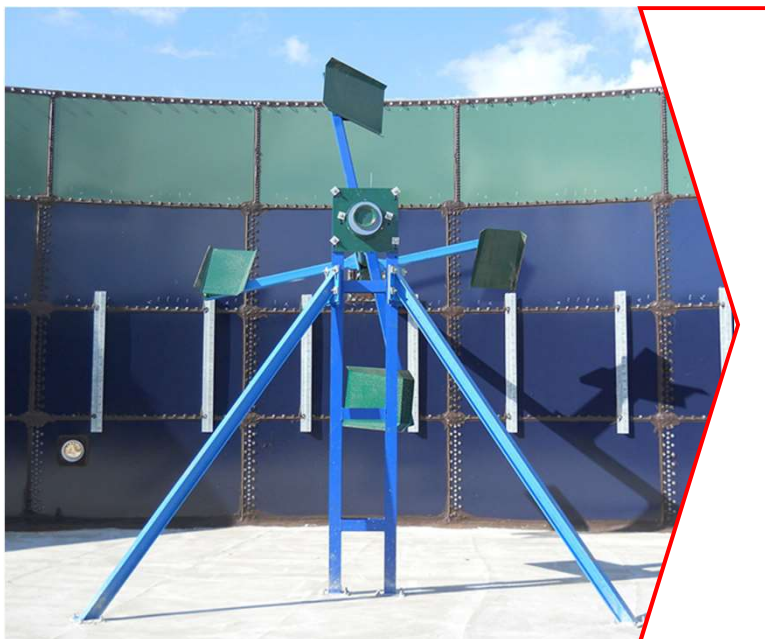

Reactor`s mixer Paddle-giant (AG-01..04)

The inclined paddle high-power mixer Paddle-giant is designed and engineered for high efficiency with all types of raw materials (including highly viscous media). The operating mode is designed to maximize the preservation of bacterial populations (to achieve optimal gas output).

The mixer bearing is made of special, extremely wear-resistant and rust-proof plastic. All components can be replaced without the need to drain the reactor or replace the mixer shaft. The operating principle is ideal for breaking up floating layers and supports the mixing of solidification layers. Degassing of the substrate is simplified.

This type of mixer is suitable for minor fluctuations in filling levels. In the production of mixers, gearboxes and motors from well-known European manufacturers are used. This guarantees a long service life of our mixers. All motors and gearboxes are available with ATEX certificates.

Specifications

Engine power:	11 kW
Quantity per reactor:	4 pcs
Total quantity:	4 pcs



Window with spotlight (SG-01)

Inspection windows are designed for visual control of processes inside the fermenter. Spotlights were made in explosion-proof with automatic disconnection. Inspection windows are equipped with a cleaning washing system.

Specifications

Inspection windows: Ø300

Spotligh:
VISULUX UL50 -G -H 230V, 50W, IP65



Pump equipment (PU-01...PU-03)

Pumps are used to transport substrate to the equipment and facilities in the biogas plant and away. Biogas plant design allows to access easily to all pumps. Pumps are driven by helical geared motor. Stator has hopper inlet for optimum filling of the pumping chamber, wear-protected, robust universal joint with feeding screw, robust bearing pedestal with close-coupled drive and self-centering of the drive shaft. Pumps have modular design for high flexibility, low life-cycle-costs.

Specifications

Liquid substrate pump (PU-01)

Engine power:	5,5 kW
Flow rate:	25 m3/hour
Pressure:	4 bar
Quantity:	1 pcs

Substrate pump (PU-02)

Engine power:	11 kW
Flow rate:	8-25 m3/hour
Pressure:	4 bar
Quantity:	1 pcs

Filtrate pump (PU-03)

Engine power:	5,5 kW
Flow rate:	25 m3/hour
Pressure:	4 bar
Quantity:	1 pcs



Separator (SR-01)

The Press Screw Separator covers a broad spectrum of applications, from agriculture to biogas and bioethanol plants. The innovative technology separates substrates in its solid and liquid elements. The secret of the versatility of the press screw separator is that it can adjust to different dry matter contents and Thick liquids (20% dry matter content). Slotted screens have different assortment and width of table cells and give possibility work with small solids and fiber contents. In the slotted screen, the solids are screened out from the liquid. The solids build up a layer which also acts as a filter to separate finer particles from the liquid. The auger flights convey this layer to the solids outlet. The screen surface is cleaned and a new filter layer is formed. The design of the screens is not conducive to plugging. The pressure in the first part of the screen is low but increases with the solid consistency to the solid output. The consistence of the gained solid can be varied with the help of a output regulator by the amount and position of counter weights. This way the required consistency of the final product for either further storage, use as fertilizer or the basis for compost can be reached. The liquid phase can easily be drained through a pipe or hose system.

Specifications

Engine power:	7,5 kW
Flow rate:	8-20 m3/hour

Quantity:	1 pcs
-----------	-------

Equipment
 Frame
 Screw
 Sieve for the filtration
 Counterweights
 The design of the protective room



Receiving tank (RT-01) and Filtrate tank (FT-01)

Reinforced concrete reservoir for reception of liquid kinds of raw materials. The reservoirs are equipped with level sensors and submersible agitators for mixing substrate.

Specifications

Receiving tank (RT-01)

Diameter:	7,0 m
Height:	2,5 m
Total volume:	48 m ³
Quantity:	1 pcs

Filtrate tank (FT-01)

Diameter:	6,0 m
Height:	2,5 m
Total volume:	48 m ³
Quantity:	1 pcs



Submersible mixer (AG-05... AG-06)

The submersible motor agitator serves for mixing renewable raw materials (RRM), liquid substrate as manure and similar substrates. The electro-motor driven submersible agitator is designed for submersion operations in potentially explosive environments of Ex zone 2 and complies with Directive 94/9 EC. The submersible agitator can be attached to most sliding masts by means of the motor support. A mounting option for a hauling cable is provided on the motor support for height adjustment purposes.

Due to the 4-roller guidance of the motor support, the agitator can be lifted and lowered without friction and the square mast, even if the pull of the hauling cable is slightly angular. The motor support is designed for a 100 x 100 mm square sliding mast as standard, but can also be used for an 80 x 80 mm sliding mast by changing the rollers. The strain relief of the connecting cable can be positioned in the extension of the motor or towards the top on the motor support, depending on the requirements. This enables universal utilization with the most various installation kits.

The geared motor is made of spheroidal graphite iron (GGG40) and painted, the propeller is galvanized and the motor support is made of stainless steel. The submersible motor agitator is designed as a water pressure-tight monoblock unit for driving the three-vane propeller. The submersible agitator is of modular design, submersible electro-motor with flange-mounted planetary gear and bearing flange for holding the propeller. The conical shaft in the bearing flange is mounted in the oil bath by two angular roller bearings and sealed off from the agitating substrate with a mechanical seal.

Specifications

Submersible mixer for the receiving tank	(AG-05)
Nominal power:	3,0 kW
Quantity:	1 pcs
Submersible mixer for the filtrate tank FT-01	(AG-06)
Nominal power:	3,0 kW
Quantity:	1 pcs



Gasholder (GH-01)

The gasholder provides for biogas storage and for equalizing pressure and biogas composition. The gasholder system has a two-layer construction. The external material consists of a weather-proof film of PVC-coated polyester fabrics with UV protection. Both sides are finished with an external N/5cm, internal membrane PELD (gasholder) membrane.

The gasholder has a methane permeation maximum of 260 cm³/m² * 1 bar biogas resistance. The gasholder film temperature range allows operation from -30°C to +60°C.

The internal film is stretched under normal biogas pressure. Air is blown into the space between the external and internal membranes to pressurize the internal membrane and form the shape of the external membrane.

The biogas pressure in the gasholder is 2-5 mbar. The membranes are designed and cut out on NC machines. Welding is executed by high frequency currents. These steps yield substantial improvements for quality and service life compared to handmade membranes welded by standard welding equipment.

To prevent damage to the gasholder as a result of overpressure conditions, a safety valve is installed. To survey the internal membrane, an inspection window is installed on the external membrane.

Specifications

Height:	6,0 m
Diameter:	30,0 m
The total volume :	1690 m ³
Quantity:	1 pcs




Biogas Scrubber (SC-01)

The biogas scrubber works by bringing the gas stream into close contact with a liquid containing a scrubbing agent. As a result of this contact, the target gaseous components, such as H₂S, dissolve and remain in the water. This results in the transfer of components from the gas phase to the liquid phase, also known as absorption. The solubility of the particles in the liquid determines how the gaseous components dissolve in this phase. The scrubbers are made of glass fiber reinforced polyester (GRP). The completely smooth inner surface of the polyester ensures perfect evacuation and high chemical resistance to the various products to be stored. Specially designed for gas streams generated in industry and biogas plants. Each scrubber is manufactured using the resins most suitable for each specific product, and all equipment has a factory warranty and a production certificate.

Specifications

Gas volume flow:	400 m ³ /hour
Diameter:	4,5m
Height:	12m
Electric power:	1,5 кВт
Quantity:	1 pcs

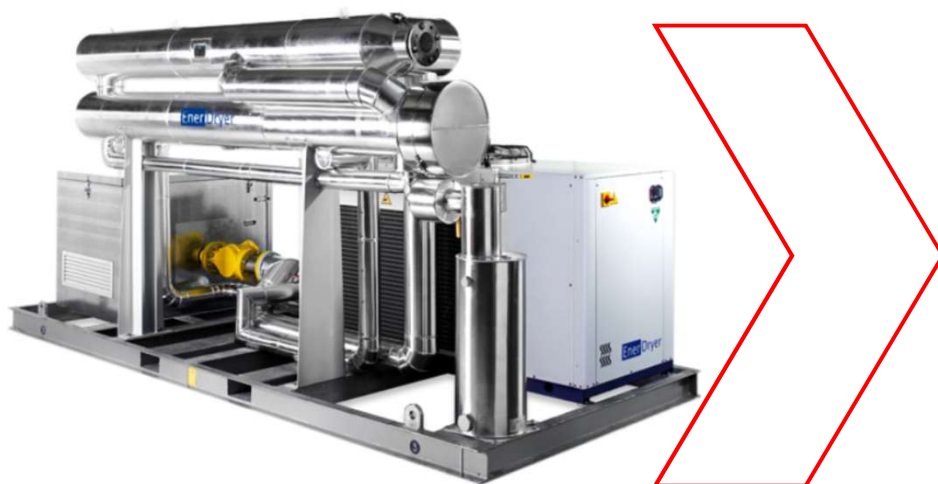

Biogas dryer and cooling (CHL-01)

Biogas dryer and cooling are provided with special equipment as GAS COOLER and AIR-COOLED LIQUID CHILLER. Biogas plants thanks to an extensive range of dedicated Biogas solutions, low pressure heat exchangers, a comprehensive range of water chillers and RWD Dry Coolers. Designed as one-way shell-and-tube heat exchanger. Process gas inside of the tubes; cooling water in the shell. All parts in contact with the process gas made of stainless steel 316Ti or 316L; heat exchanger shell made of stainless steel/ Designed with gas outlet chamber outlet connection radial; inspection opening axial Official acceptance according to PED 2014/68/EU in accordance with ADMerkblätter and factory pressure test.

Specifications

Gas volume flow:	400 m ³ /hour
Gas inlet temperature:	+38°C
Gas outlet temperature:	+10°C
Electric power:	18,0 кВт
Quantity:	1 pcs



Biogas compressor (BC-01, BC-02)

Biogas blower is a device used to move gas and increase pressure thanks to a rotating impeller within a toroidal channel, so there is a progressive increase of energy.

Blower is used to transporting biogas from gasholder storage to consumer (biogas upgrading plant in our case).

Specifications

Flow rate:	400 m3/hour
Pressure:	150 mbar
Engine power:	3,3 kW

Quantity:	2 pcs
-----------	-------




Desulphurization system

The desulphurization system is a 3-step system. Stage 1 is adding Iron Hydroxide. Stage 2 - biological. Adding a certain portion of air to the fermenter. Air by special bacteria, converting H_2S into S. After 1 and 2 steps the sulphur concentration is 80 ppm. Stage 3 - activated charcoal filtration, as activated charcoal has the capability to absorb sulfur. After passing through activated charcoal filters, the sulfur concentration is reduced to 0 ppm.

Specifications

Charcoal filter	(CF-01)
The volume of charcoal:	200 kg
Quantity:	1 pcs

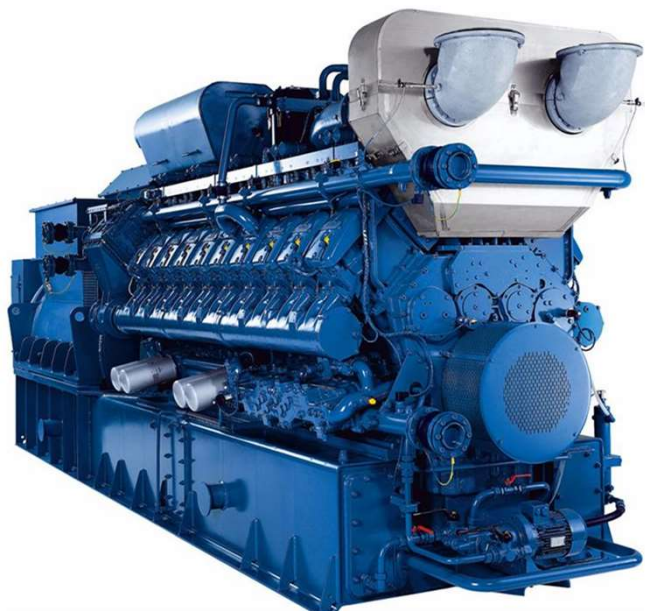


Cogeneration Power Plant (CHP-01)

A cogeneration power plant (CHP) is used for producing electricity and heat. CHP is a very efficient technology for generating electricity and heat together. A CHP plant is an installation where there is simultaneous generation of usable electric power and heat in a single process, and it can provide a secure and highly efficient method of generating electricity and heat at the point of use. Due to the utilization of heat from electricity generation and the avoidance of transmission losses, due to electricity being generated on site, CHP typically achieves a 35 per cent reduction in primary energy usage compared with power stations and heat only boilers. This allows for economic savings where there is a suitable balance between heat and power loads. Another important factor, showing the benefits of cogeneration and CHP, is its low environmental impact. CHP produces lower quantities of pollutant emissions and heat pollution of the atmosphere. The current mix of CHP installations achieves a reduction of over 10 per cent in CO₂ emissions in comparison with combined-cycle gas turbines.

Specifications

Produced electric power:	1000 kW
Produced heat power:	1035kW
Generator:	400 V, 50Hz
Количество:	1 шт.

Emissions
NO_x <500 mg / Nm³ (5% O₂)

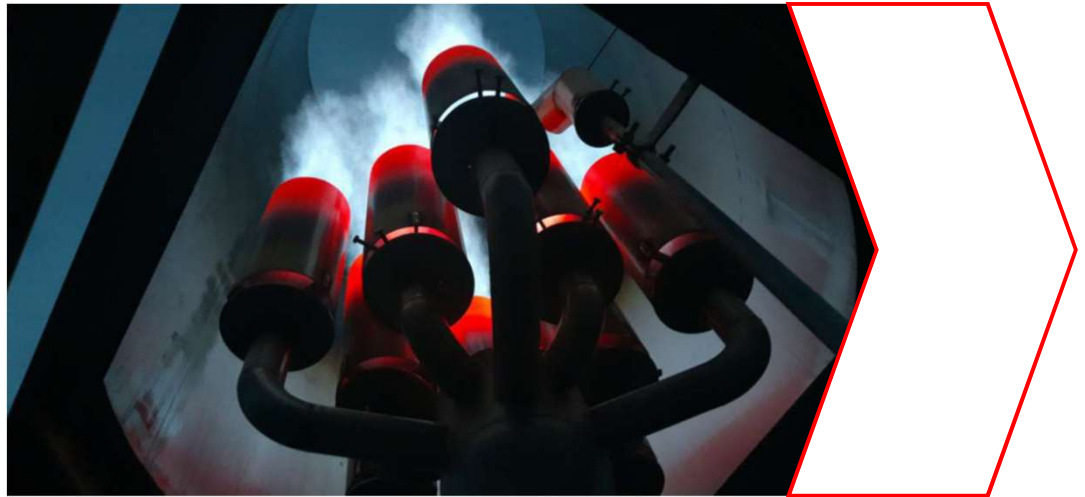

Flare

Flare is designed for the temporary or periodical complete combustion of the biogas produced by biogas plants without the possibility of its use as an energy source. The burn system consists of a burner and additional equipment. The burner is designed on the principle of injection and consists of a combustion nozzle with an injector with an air supply control system, flame protection tube, fitting and burner control system. The biogas combustion system is made of stainless steel.


The supporting structure holds the burner and vertically mounted socket. The burn control system is installed in a case, which is mounted on the supporting structure of the combustion system and contains all the elements for monitoring and controlling ignition and flame.

Specifications

Flow rate:	400 m ³ /hour
Pressure:	min 10 mbar- max 60 mbar

Quantity:	1 pcs
-----------	-------

Water supplying and sewerage system



Water supplying system provides biogas plant feed water, water for network circuits, the domestic water and fire safety systems. As used centrifugal single stage pumps as main pumping elements. These pumps are designed for pumping waste water, household / domestic water and sewage. Pressure Boosting Systems are designed for pure water pressure boosting in industrial plants. The booster comprises 2 to 3 (connected in parallel pumps) installed on a common base frame, and provided with all the necessary fittings.

Specifications

Drain pump
Pressure 4m
Flow 2-3 m³ / h
Engine 0,24 kW

Equipment
Pump case control
Stove-base
gauges
Check valves
Float switches
Brackets
Valves



Heating system

Heating equipment is using for biogas plant heating and for sustaining constant temperature in the fermenter. Heating equipment includes circulation pumps, heat exchanger, heating manifold and pipes. The heat from the boiler is transferred to the biogas plant by using heat exchanger, and then is pumped through of biogas plant by circulation pumps. A heat carrier prepares water with an additive of ethylene glycol. Inlet temperature in the fermenter is 60C, the outlet is 40C.

Specifications

Circulating pump feeding heat carrier

Engine power:	3,5 kW
Flow:	28 m ³ /hour
Pressure:	1 bar

Circulating pump feeding heat carrier

Engine power:	2,0 kW
Flow:	12m ³ /hour
Pressure:	1 bar

The pumping station feeding propylene glycol

Engine power:	0,7 kW
Flow:	1 m ³ /hour
Pressure:	4 bar




Dry cooler (cooling substrate system)

Device is designed to cool the substrate to working temperature according to technological regime. When use high temperature substrate, there is a chance of uncontrolled heating. The cooler is connected to the heating pipes, heat exchangers and it will be activated if it is need.

Specifications

Heat power:	100 kW
Electric power:	4 kW
Quantity:	1 pcs

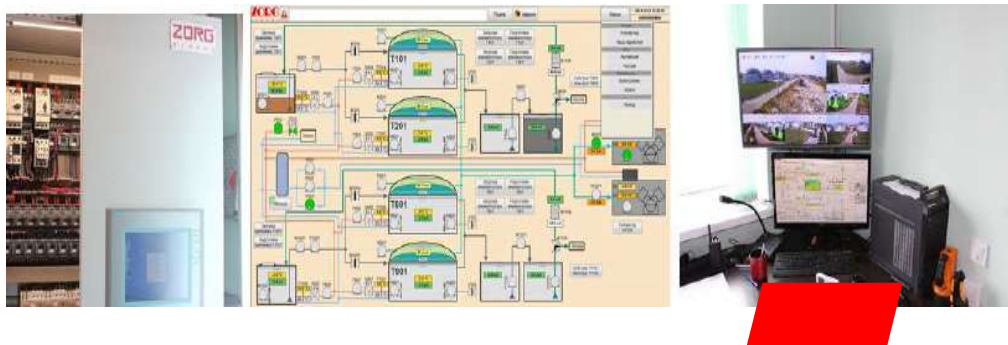

Automation and electrical equipment

Process control equipment is used for supervision and regulation operation of the plant and for the limitation of damage. In case of emergency (for example, breakdown of the electrical power supply) the biogas plant is automatically transferred to safe operating conditions by the process instrumentation. Critical electrically driven devices are supplied with emergency power. An automatic system allows the supervision of the plant in real time and to recognize and correct aberrations immediately; to run the plant at its optimum saving resources and costs; and to record for the electronic database operation parameters. The automatic system consists of a control cabinet and sensors for parameter control of technological processes and execution devices.

The control cabinet is designed based on the industrial controller Siemens CPU315-DP2, using periphery distributing system Simatic ET200S, and operator panel OP277 Touch with touch-sensitive controls. Communications is executed by PROFIBUS and MPI with physical interface RS-485. The control program is designed based on the Simatic Step7. The control cabinet is a modular design. The upper part has a power box with central and front-end processor. The periphery distributing system, Simatic ET200S, is installed with input - output units. The lower part with interface relay and clips is installed for connecting execution devices. The entire plant is controlled by a single operator.

Specifications

Incoming control case with automatic set ASE-1, 2, 3

Base Siemens CPU315-DP2 controller


Peripherals Simatic ET200S

Control panel OP277 touchscreen

Communication PROFIBUS and MPI

Interface RS-485

Control system Simatic Step7

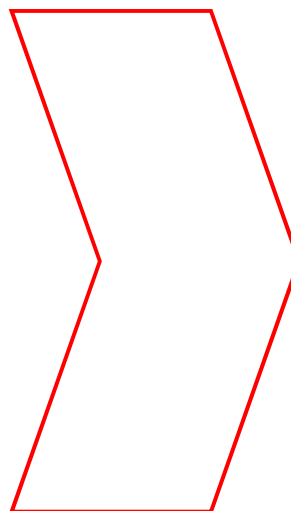

Gas analyzer (CH₄, CO₂, H₂S, O₂)



Gas analyzer is a measuring device for determining the qualitative and quantitative composition of a gas mixture. In absorption gas analyzers installed at biogas plants, the components of the biogas mixture are sequentially absorbed by various reagents. Automatic gas analyzers continuously measure any physical and physicochemical characteristics of the gas mixture or its individual components. Their operation is based on physical analysis methods, including auxiliary chemical reactions.

Specifications

The kit includes
Wall mounting bracket
LC display
Flow meter / control valve
Sensors



Sensors set

Sensors are used to measure physical quantities (temperature, pressure, level of moisture) data collection.
installation kits

Specifications

Conductometric sensor

Pressure Sensor / level

Ultrasonic sensor

Gas Pressure Sensor

Temperature converters with protective sleeves

The moisture sensor and the gas temperature



Laboratory

Monitoring and control of parameters of raw materials and fermentation processes is important for the efficient operation of a biogas plant. The laboratory allows you to assess the content of dry matter in the input raw materials, fermented mass, determine the ratio of volatile organic acids to total inorganic carbon (FOS/TAC parameter), determine the degree of substrate fermentation in fermenters, the level of biogas output, and evaluate the efficiency of separator.

Equipment

Analytical scales

Moisture analyzer

Automatic titrator

Laboratory pH meter

Centrifuge

A set of flasks

Equipment specification list



Nº	Equipment	Characteristic	Quantity
1	Loader	V=20m3	1
1.1	Container bunker		1
1.2	Feeding screws	set.	1
2	Submersible mixer	N=3,0 kW	2
2.1	Airtight motor gearbox		2
2.2	Hydraulic screw (wear-resistant steel)		2
2.3	Mixer control mechanism		2
2.4	Electric motor mount		2
2.5	Set of fasteners		2
3	Reactor (steel enameled tank)	V=3974m3	1
3.1	Inspection window	unit	1
3.2	Flanges for connecting communications, unit		1
3.3	Service kits (for mixers, valves and connections)		1
3.4	Electric motor mounting		1
4	Reactor`s agitator	N=11 kW	4
4.1	Airtight motor gearbox		4
4.2	Hydraulic screw (wear-resistant steel)		4
4.3	Shaft (adapted to the height of the fermenter)		4
4.4	Blade		4
4.5	Frequency converter		4
4.6	Mounting bracket to bottom of the mixer		4
5	Safety valve of digesters		1
6	Substrate digested pump	8-20 m3/hour N=11.0 kW	1

Nº	Equipment	Characteristic	Quantity
7	Separator	N=7,5 kW, 8-20m3/h	1
7.1	Body		1
7.2	Substrate Supply Pipe 4 ''		1
7.3	Engine - Gearbox	N=7,5 kW	1
7.4	Frame		1
7.5	Screw		1
7.6	Sieve for filtration		1
8	Liquid substrate pump	25 m3/hour N=5,5 kW	1
9	Filtrate pump	25 m3/hour N=5,5 kW	1
10	PVC gas holder	1690 m3	1
10.1	Weather protection film	Ø30 m	1
10.2	Gasholder film PELD methane permeation max.260 cm3/m2*d*1 bar, 650 N/5cm biogas resistant		1
10.3	Air blower	16A, 0,5kW	
10.4	Excess and minimum pressure valve		1
10.5	Dome level sensor		1
10.6	Mounting system		1
10.7	Accessories		1
10.8	Safety valve		1
11	Biogas Cooling System	400 m3/h	1
11.1	Chiller		1
11.2	Heat exchanger		1
11.3	Polypropylene glycol tank		1
12	Desulphurization system		1
12.1	Numbers of charcoal columns	200 kg	1
12.2	Scrubber	400 m3/h	1

Nº	Equipment	Characteristic	Quantity
13	Biogas compressor	Q=400m3/h, H=150mBar, N=3,3kW	2
14	Electromagnetic flow meter		1
15	Flare	400 m3/h	1
16	Gas equipment included	set	1
16.1	Drainage pump with float	DN=50, Q=1m3/h, H=13 m	2
17	The heat supply system	set	1
17.1	Diaphragm expansion tank	V=1000 l,P=6Bar T=120°C	1
17.2	Circulating pump for supplying heat carrier	Q=30 m3/h,H=1bar	1
17.3	Propylene glycol feed pump station heating systems	Q=1,0 m3/h, H=4 bar	1
17.4	Circulation pump for supplying heat carrier to the digester	Q=18 m3/h, H=1.1 bar	1
18	Water supply and sewerage system, complete, disassembled	set	1
19	Automation with electrical equipment	set	1
19.1	Incoming distribution cabinet with a set of automation DB-1		1
19.2	Incoming distribution cabinet with a set of automation DB-2		1
20	Sensors, set		1
20.1	Gas pressure sensor 0,025Bar		1
20.2	Gas pressure sensor 0,4Bar		1
20.3	Pressure sensor(substrate level) 1,0Bar		2
20.4	Pressure sensor (substrate pressure) 2,5bar		2


Nº	Equipment	Characteristic	Quantity
20.5	Resistive thermometer (gas temperature)		3
20.6	Resistive thermometer with thermo well (fermenter substrate temperature)		3
20.7	Resistive thermometer with thermo-well (digester tank substrate temperature)		3
20.8	Resistive thermometer (heat conductor temperature)		3
20.9	Conductometric sensor of maximum level		3
20.10	Conductometric sensor of water level		3
20.11	Dome position sensor		1
20.12	Coolant pressure sensor	SEN 3276 B065 G1/2 6Bar	7
20.13	Humidity and gas temperature sensor	ESFTF-I	1
21	Dry cooler 100kW heat pow.		1
22	Cogeneration power plant	set	1
23	Laboratory	set	1


APPENDICES



Material flow diagram

Appendix 1

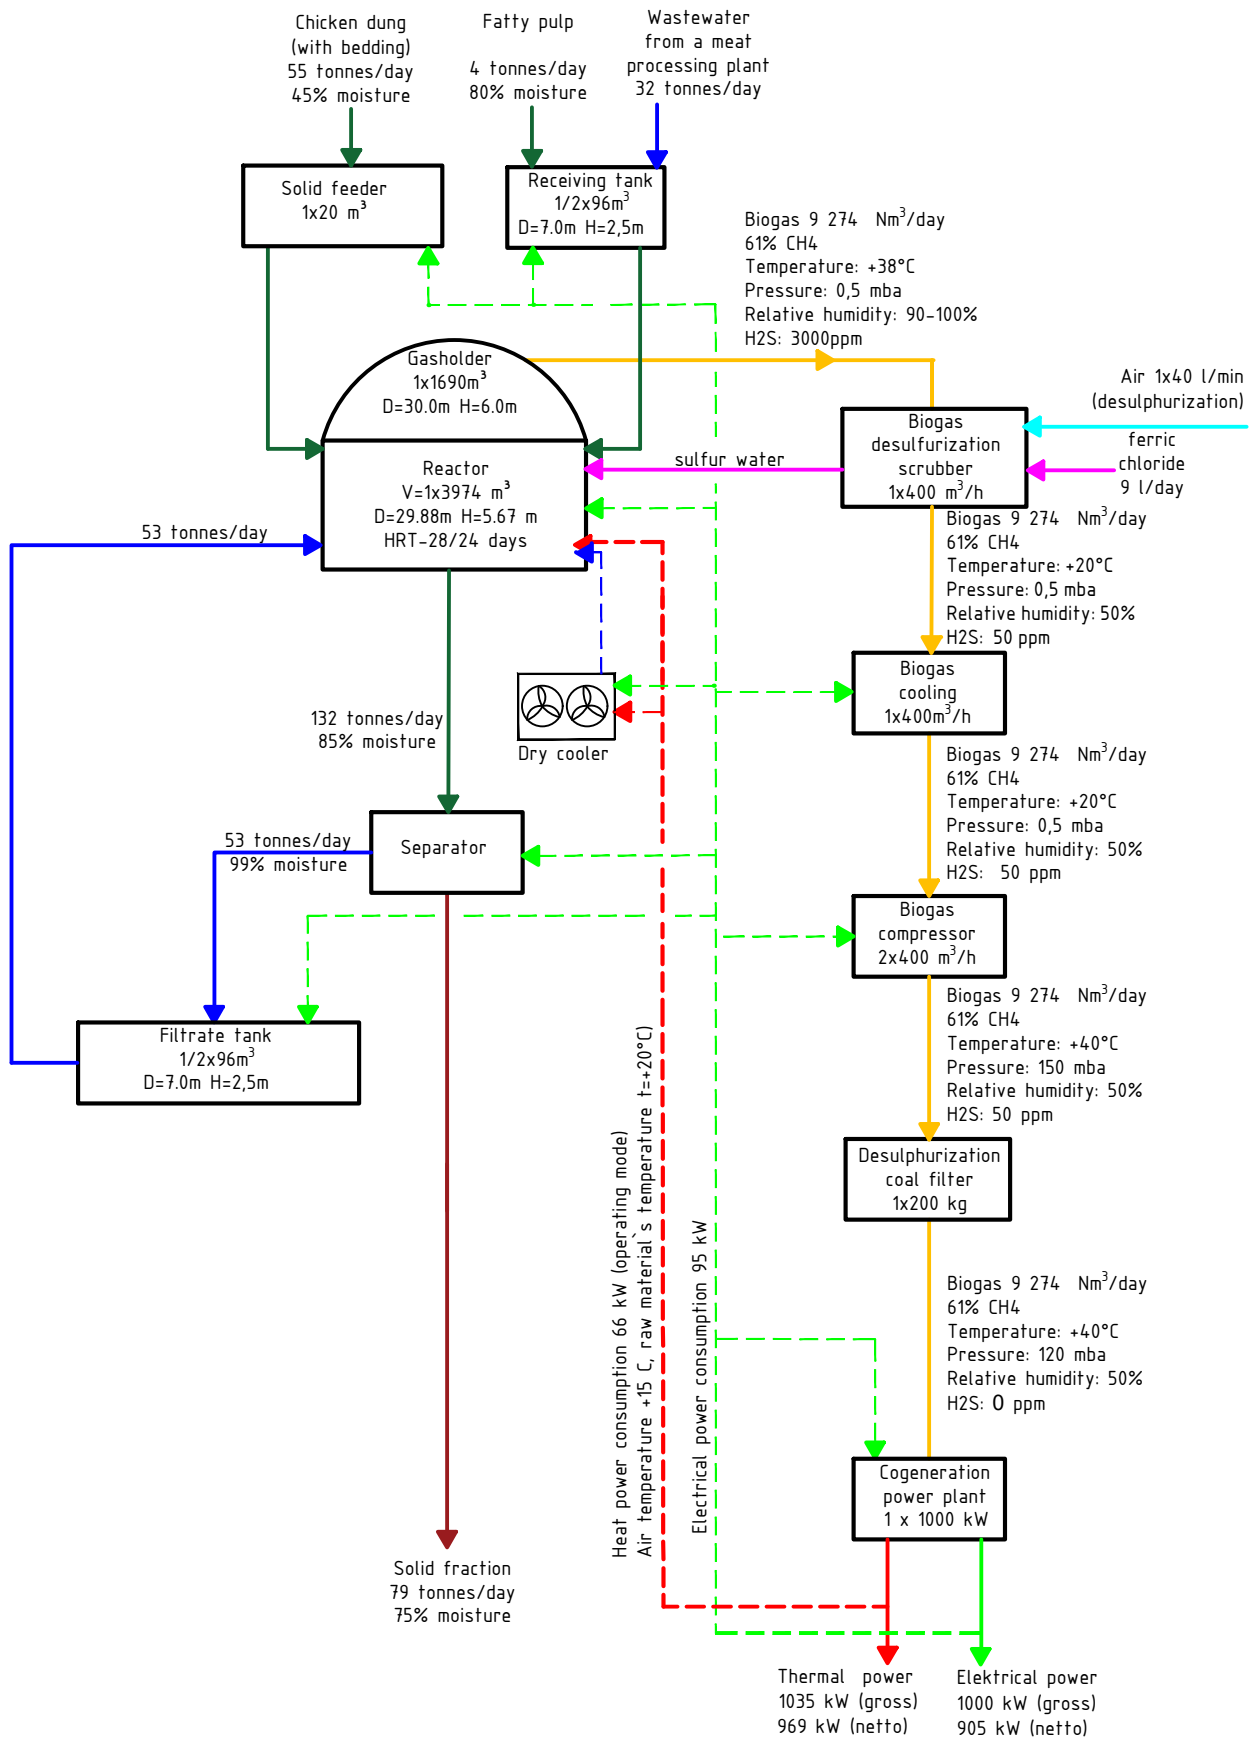

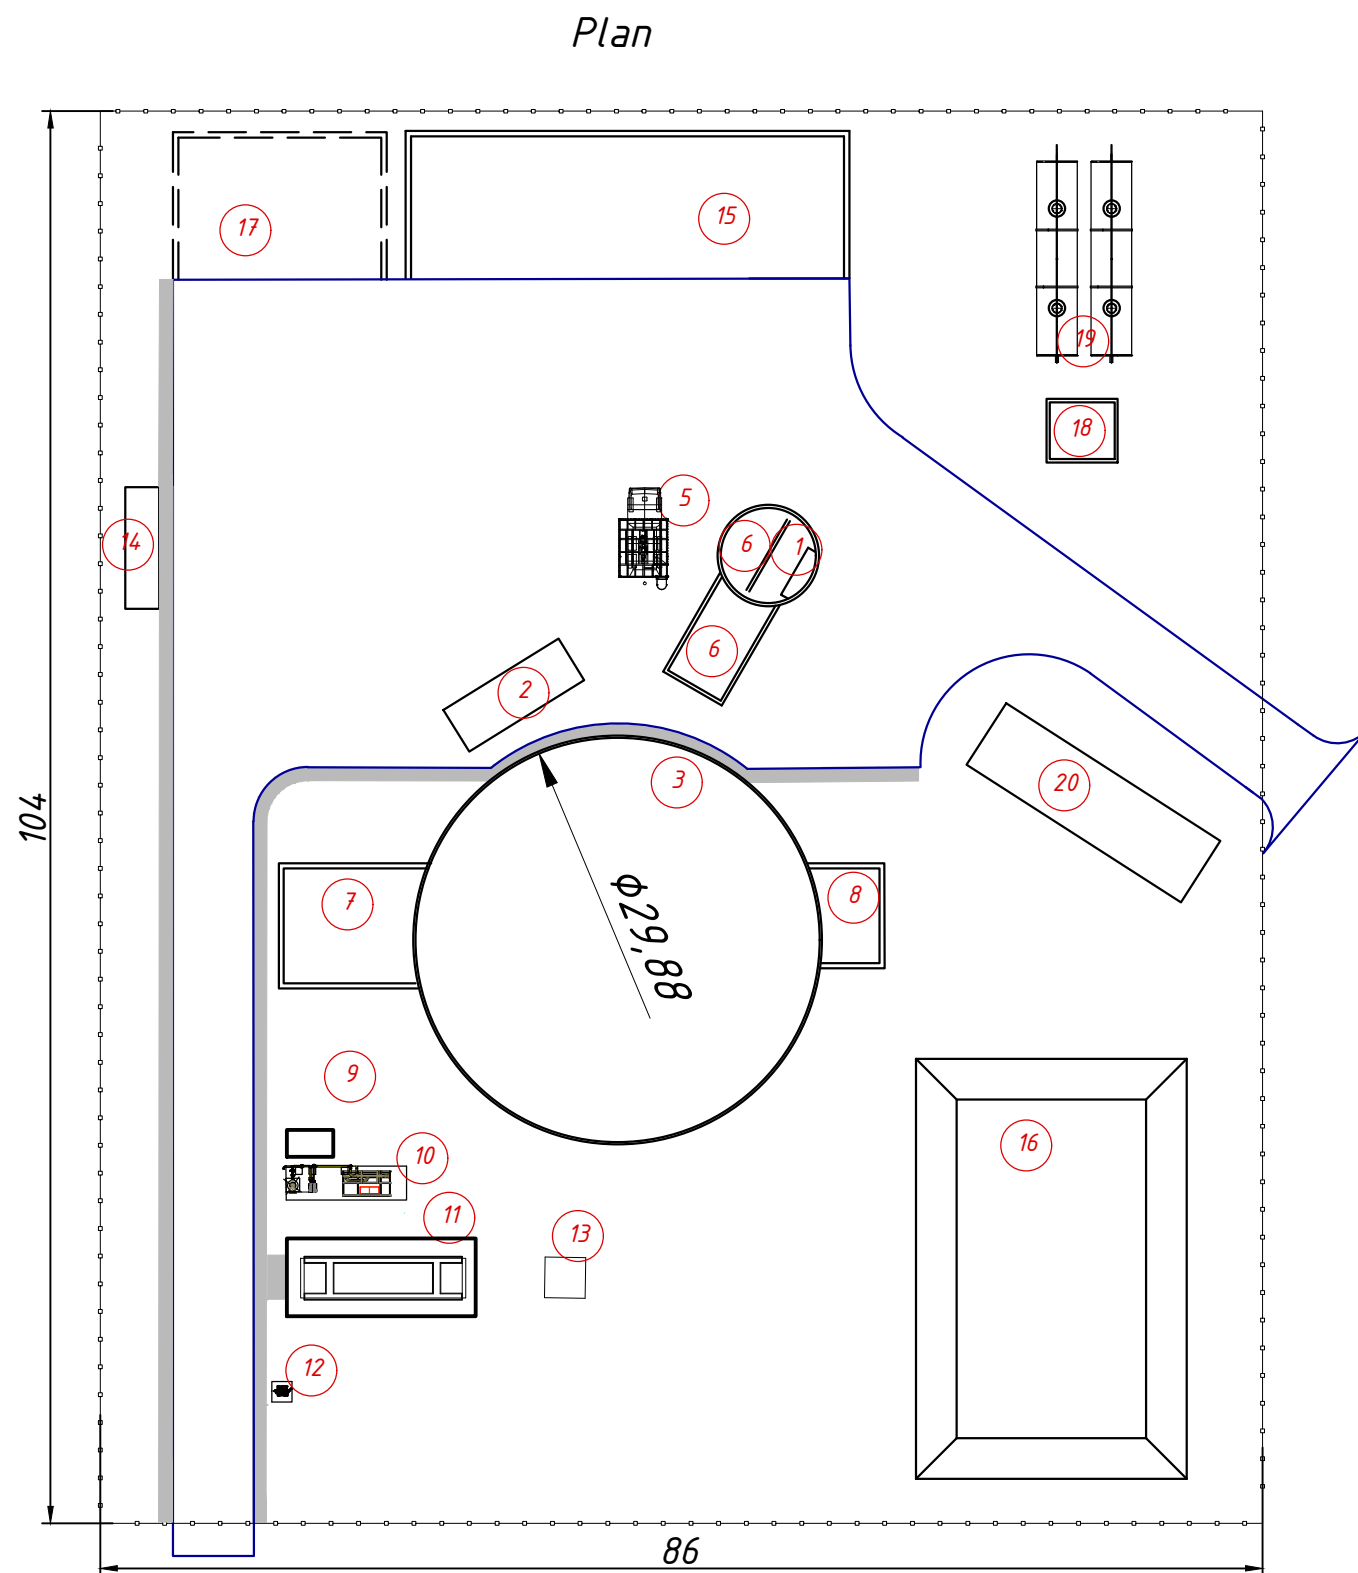

Explication

<i>N/Nº</i>	<i>Name</i>	<i>Q-ty</i>
1	Receiving tank (RT-01)	
2	Solid feeder(SF-01)	
3	Reactor (R-01)	
4	Separator (SA-01)	
5	Filtrate tank (FT-01)	
6	Equipment room	
7	Technical room	
8	Technological room	
9	Scrubber area	
10	Gas preparation	
11	Cogeneration power plant (CHP-01)	
12	Flare (BF-01)	
13	Transformer	
14	Operator's room	
15	Fermented mass storage	
16	Lagoon	
17	Drying and granulation area (perspective)	
18	Fire pump station	
19	Fire tank	
20	Rainwater treatment plants	

Appendix 4

Biogas plant					
Name equipment	Instal. Pow. (kW)	Q-y (pcs)	Total installed power (kW)	Working hours per day	Consumption kWh per day
Loader V=20 m ³	44,0	1	44,0	4,0	176,0
Screw set.	26,0	1	26,0	4,0	104,0
Reactor's mixer paddle giant	11,0	4	44,0	18,0	792,0
Submersible mixer in receiving tank	3,0	1	3,0	12,0	36,0
Submersible mixer in filtrate tank	3,0	1	3,0	12,0	36,0
Biogas cooling system	18,0	1	18,0	24,0	432,0
Biogas compressor	3,3	2	6,6	12,0	79,2
Separator	7,5	1	7,5	8,8	66,0
Substrate pump to separator	11,0	1	11,0	8,8	96,8
Liquid substrate pump	5,5	1	5,5	1,0	5,5
Filtrate pump	5,5	1	5,5	1,5	8,3
Air compressor for gasholder lock	1,5	1	1,5	1,0	1,5
Air blower for double membrane	1,0	1	1,0	24,0	24,0
Scrubber	1,5	1	1,5	24,0	36,0
Circulation pump for supplying heat carrier to the digester	0,8	1	0,8	24,0	18,0
Cogeneration power plant	15,0	1	15,0	24,0	360,0
Circulation pump for supplying heat to the technical building	0,8	1	0,8	only ambient temp +15°C	
Digester cooling system	4,0	1	4,0	at t>40°C	
Circulation pump for supplying network water to the digester cooling system	2,2	1	2,2		
Circulating pump feeding hot water at technical building	0,1	1	0,1	24,0	1,9
Propylene glycol pump station	0,8	1	0,8	0,5	0,4
Drinage pump	1,0	1	1,0	0,5	0,5
Lighting of the biogas plant territory	0,6	1	0,6	8,0	4,8
Spot light for digesters inspection windows	0,1	1	0,1	0,5	0,0
Working lighting of switchboard	0,1	1	0,1	0,5	0,1
Total installed power, kW			203		
Total consumed electric energy, kWh per day					2279
Total consumed power, kW					95

Prices for equipment and services for biogas plant 55 tonnes bedded brioler dung per day

Pos	Name	Number of units	Unit price, EUR	Discounted price sub-total, EUR	
1	Project documentation	1	59 000	59 000	
2	Supervision	1	25 000	25 000	
3	Startup and training	1	25 000	25 000	
4	Living and travel expenses	1	15 000	15 000	
5	Delivery of the equipment (truck)	7	8 000	56 000	
6	Laboratory	1	27 000	27 000	
7	Reactor V=3974 m³ (including ladders, platforms, hatches, pipe flanges, supports, fasteners, etc.)	1	365 000	365 000	
8	Solid feeder 20 m3	1	124 000	124 000	
9	Screw conveyor	1	83 000	83 000	
10	Digester agitator (paddle-gigant)11 kW	4	72 000	288 000	
11	Substrate pump 5,5 kW	1	27 000	27 000	
12	Digested substrate pump 11 kW	1	29 000	29 000	
13	Filtrate supply pump 5.5 kW	1	27 000	27 000	
14	Substrate separation unit 7,5 kW	1	58 000	58 000	
15	Submersible agitator for receiving tank 3 kW	1	11 000	11 000	
16	Submersible agitator for filtrate tank 3 kW	1	11 000	11 000	
17	Over- and under pressure safeguard	1	8 000	8 000	
18	Water supply and canalization system	1	29 000	29 000	
19	Heat supply station	1	35 000	35 000	
20	Dry-cooler cooling system for reactors	1	27 000	27 000	
21	Automation and electric cabinet	1	145 000	145 000	
22	Motorized valves (set)	6	8 000	48 000	
23	Sensors (set)	3	20 000	60 000	
24	Gasholder D=30m	1	95 000	95 000	
25	Biogas scrubber 400 m3/h	1	300 000	300 000	critical!!!
26	Biogas chiller (Biogas cooling system) 400m3/h	1	75 000	75 000	
27	Biogas blower 400m3/h	2	8 000	16 000	
28	Desulphurization column with active coal 200 kg	1	29 000	29 000	
29	Biogas flare 400m3/h	1	78 000	78 000	
30	Gas analyzer (portative)	1	7 500	7 500	
31	Gas conditioning unit	1	27 200	27 200	
32	Cogeneration power plant MWM 1000 kW	1	554 000	554 000	
33	Construction	1	500 000	500 000	Client
TOTAL by ZORG, EUR				2 763 700	
TOTAL by Client, EUR				500 000	
TOTAL by ZORG+Client, EUR				3 263 700,00	

Implementation terms and payment

Months	11.25	12.25	01.26	02.26	03.26	03.26	04.26	05.26	06.26	07.26	08.26
Data collection											
Project documentation		50%	50%								
Obtaining permits											
Equipment					30%	20%	20%	30%			
Equipment supply											
CHP unit			30%						70%		
CHP unit (supply)											
Construction											
Supervision					50%			50%			
Plant start-up											50%

Contracts

Project implementation is executed simultaneously under several contracts

- » Engineering contract
- » Equipment supply contract
- » Supervision contract
- » Start-up and training contract

List of exclusions for 1000 kW biogas plant:

- 1) Project report, civil permits and authorizations, adaptation of the project documentation by a licensed local engineering organisation for the permit purposes. Namely the organisation puts their stamp and acts act the face of the project. The design documentation is not changed in fact. 10 000 – 15 000 EUR
- 2) Topographic and geological surveys 3000-7000 EUR
- 3) Electric transformer and the external electric line 130 kW for start-up
- 4) External roads
- 5) Temporary water supply during the construction and the hydraulic test of reactors at least 400 m³ water per day. It can be a technical quality water from a river, lake, well. Not salty.
- 6) Bacterial seed for the start-up. It can be biomass from another biogas plant. Possibly also cow manure, any kind of manure, sludge from city sewage treatment plant. Customer needs to bring the seed one-time during a 1-2 weeks period and to fill with it at least 15-20% of the reactor volume 600-800 m³. The rest is filled with the water item 7 above.
- 7) Machinery to transport Chicken dung and fatty pulp to and from storage to the solid feeders (a truck, a frontal loader, a tractor)
- 8) Machinery to transport filtrate and the digested mass from the biogas plant to the agricultural fields (a truck, a frontal loader, a tractor)
- 9) Activated carbon 0,2 tonne per two years x 4800 EUR/tonne = 960 EUR
- 10) FeCl₃ – 3,3 m³ per year x 900 EUR/m³= 2970 EUR
- 11) Demineralized water to the heating system 1.5 tonnes
- 12) Spare parts for two years 80 000 EURO



Business center "Twin Yards"
Walter-Gropius-Straße 23,
DE-80807, München, Germany

Mob. +49 1511 457 29 45 (WhatsApp, Viber, Telegram)

igor.reddikh@zorg-biogas.com
www.zorg-biogas.com